



KOMET KUB[®] Drillmax
High-performance drills for small diameters
Inch-size program, 5×D, 7-8×D

KOMET KUB® Drillmax

High-performance drill for small diameters – Inch-size program – Ø 0.120" - 0.750"

The new inch program for the KUB® Drillmax high-performance solid carbide drills completes our range of metric drills. The inch drills are available in diameters of 0.120" to 0.750" and length/diameter ratios of 5xD and 7-8xD*.

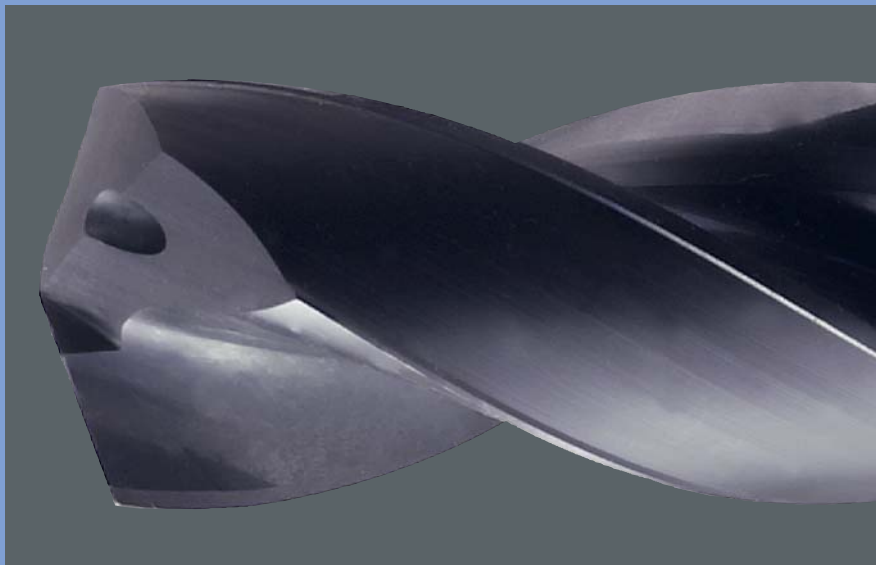
Optimized, special flutes are ideal for removing chips and for highly productive machining.

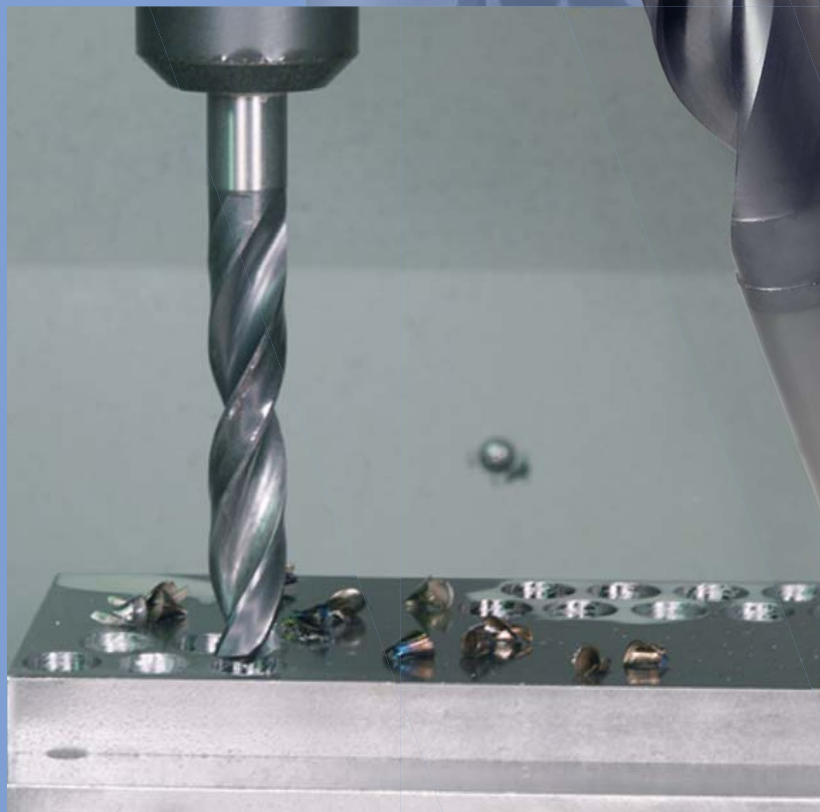
Details:

- Drill diameter (5xD): 0.120 – 0.750 inch
- Drill diameter (7-8xD): 0.120 – 0.500 inch
- Hole tolerance: IT9 (achievable)
- Drilling depth: 5xD, 7-8xD
- Shank shape: HA, HE and HB (DIN 6535)
- Coating: TiAlN
- Point angle: 140°
- Helix angle: 30°
- Internal coolant supply

BENEFITS for you:

- Inch program designed for the North American market
- Excellent hole tolerances
- Optimum chip removal thanks to special flutes
- Optimum machining result thanks to good coordination of carbide and coating with drill geometry
- Long tool edge life thanks to effective coating
- Double margins for optimum alignment and stability (7xD and longer)



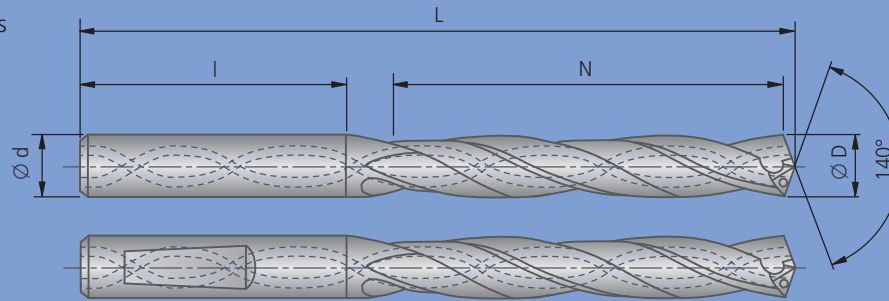


L / D	solid drilling	blind hole	forge/casting skin, interface	angled	convex	cross bore	centering bore	chamber	stack plate drilling	rough boring	adjustable
5xD	●	●	●	○	○	○	○	✗	●	○	✗

● very good ● good ○ possible: see technical notes, page ✗ not possible

■ coating: TiAlN

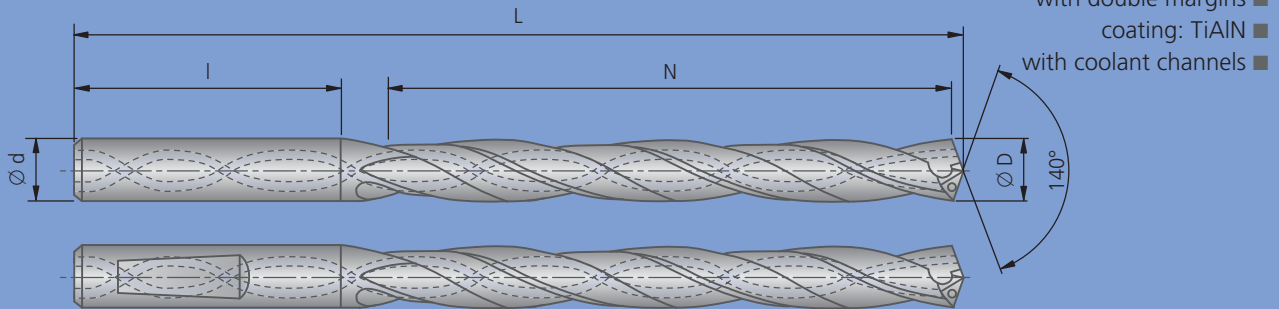
■ with coolant channels



5 x D							for workpiece material					
Ø D	Ø d x l	DIN 6535 HA Order No.	DIN 6535 HE Order No.	DIN 6535 HB Order No.	L	N	P	M	K	N	S	H
0.120	0.188 x 1.417	V03 12000.412730	V03 12000.512730	V03 12000.612730	2.598	0.944						
0.125	0.188 x 1.417	V03 12500.412730	V03 12500.512730	V03 12500.612730	2.598	0.944						
0.129	0.188 x 1.417	V03 12850.412730	V03 12850.512730	V03 12850.612730	2.598	0.944						
0.136	0.188 x 1.417	V03 13600.412730	V03 13600.512730	V03 13600.612730	2.598	0.944						
0.141	0.188 x 1.417	V03 14060.412730	V03 14060.512730	V03 14060.612730	2.598	0.944	●	●	●			
0.156	0.188 x 1.417	V03 15620.412730	V03 15620.512730	V03 15620.612730	2.913	1.181						
0.159	0.188 x 1.417	V03 15900.412730	V03 15900.512730	V03 15900.612730	2.913	1.181						
0.172	0.188 x 1.417	V03 17190.412730	V03 17190.512730	V03 17190.612730	2.913	1.181						
0.188	0.188 x 1.417	V03 18750.412730	V03 18750.512730	V03 18750.612730	3.228	1.377						
0.203	0.250 x 1.417	V03 20310.412730	V03 20310.512730	V03 20310.612730	3.228	1.377						
0.219	0.250 x 1.417	V03 21870.412730	V03 21870.512730	V03 21870.612730	3.228	1.377						
0.221	0.250 x 1.417	V03 22100.412730	V03 22100.512730	V03 22100.612730	3.228	1.377	●	●	●			
0.234	0.250 x 1.417	V03 23440.412730	V03 23440.512730	V03 23440.612730	3.228	1.377						
0.250	0.250 x 1.417	V03 25000.412730	V03 25000.512730	V03 25000.612730	3.582	1.692						
0.257	0.312 x 1.417	V03 25700.412730	V03 25700.512730	V03 25700.612730	3.582	1.692						
0.261	0.312 x 1.417	V03 26100.412730	V03 26100.512730	V03 26100.612730	3.582	1.692						
0.266	0.312 x 1.417	V03 26560.412730	V03 26560.512730	V03 26560.612730	3.582	1.692	●	●	●			
0.281	0.312 x 1.417	V03 28120.412730	V03 28120.512730	V03 28120.612730	3.582	1.692						
0.297	0.312 x 1.417	V03 29690.412730	V03 29690.512730	V03 29690.612730	3.582	1.692						
0.313	0.437 x 1.574	V03 31250.412730	V03 31250.512730	V03 31250.612730	3.582	1.692						
0.328	0.437 x 1.574	V03 32810.412730	V03 32810.512730	V03 32810.612730	4.055	1.929						
0.332	0.437 x 1.574	V03 33200.412730	V03 33200.512730	V03 33200.612730	4.055	1.929						
0.344	0.437 x 1.574	V03 34380.412730	V03 34380.512730	V03 34380.612730	4.055	1.929						
0.359	0.437 x 1.574	V03 35940.412730	V03 35940.512730	V03 35940.612730	4.055	1.929	●	●	●			
0.375	0.437 x 1.574	V03 37500.412730	V03 37500.512730	V03 37500.612730	4.055	1.929						
0.391	0.437 x 1.574	V03 39060.412730	V03 39060.512730	V03 39060.612730	4.055	1.929						
0.406	0.437 x 1.574	V03 40620.412730	V03 40620.512730	V03 40620.612730	4.645	2.204						
0.422	0.437 x 1.574	V03 42190.412730	V03 42190.512730	V03 42190.612730	4.645	2.204						
0.438	0.500 x 1.771	V03 43750.412730	V03 43750.512730	V03 43750.612730	4.645	2.204						
0.453	0.500 x 1.771	V03 45310.412730	V03 45310.512730	V03 45310.612730	4.645	2.204						
0.469	0.500 x 1.771	V03 46880.412730	V03 46880.512730	V03 46880.612730	4.645	2.204	●	●	●			
0.484	0.500 x 1.771	V03 48440.412730	V03 48440.512730	V03 48440.612730	4.881	2.362						
0.500	0.500 x 1.771	V03 50000.412730	V03 50000.512730	V03 50000.612730	4.881	2.362						
0.516	0.562 x 1.771	V03 51560.412730	V03 51560.512730	V03 51560.612730	4.881	2.362						
0.531	0.562 x 1.771	V03 53120.412730	V03 53120.512730	V03 53120.612730	4.881	2.362	●	●	●			
0.547	0.562 x 1.771	V03 54690.412730	V03 54690.512730	V03 54690.612730	5.236	2.480						
0.563	0.625 x 1.771	V03 56250.412730	V03 56250.512730	V03 56250.612730	5.236	2.480						
0.594	0.625 x 1.771	V03 59380.412730	V03 59380.512730	V03 59380.612730	5.236	2.480	●	●	●			
0.625	0.625 x 1.771	V03 62500.412730	V03 62500.512730	V03 62500.612730	5.236	2.480						
0.656	0.687 x 1.771	V03 65620.412730	V03 65620.512730	V03 65620.612730	5.236	2.480						
0.688	0.750 x 1.771	V03 68750.412730	V03 68750.512730	V03 68750.612730	5.236	2.480	●	●	●			
0.750	0.750 x 1.771	V03 75000.412730	V03 75000.512730	V03 75000.612730	5.236	2.480						

L / D	solid drilling	blind hole	forge/casting skin, interface	angled	convex	cross bore	centering bore	chamber	stack plate drilling	rough boring	adjustable
7-8xD	●	●	○	○	○	○	○	×	○	○	×


● very good ○ good ○ possible: see technical notes, page × not possible





7 – 8 × D							for workpiece material					
Ø D	Ø d × l	DIN 6535 HA Order No.	DIN 6535 HE Order No.	DIN 6535 HB Order No.	L	N	P	M	K	N	S	H
0.120	0.188 × 1.417	V04 12000.412730	V04 12000.512730	V04 12000.612730	2.755	1.102						
0.125	0.188 × 1.417	V04 12500.412730	V04 12500.512730	V04 12500.612730	2.755	1.102						
0.129	0.188 × 1.417	V04 12850.412730	V04 12850.512730	V04 12850.612730	2.755	1.102						
0.136	0.188 × 1.417	V04 13600.412730	V04 13600.512730	V04 13600.612730	2.755	1.102						
0.141	0.188 × 1.417	V04 14060.412730	V04 14060.512730	V04 14060.612730	3.622	1.771	●	●	●			
0.156	0.188 × 1.417	V04 15620.412730	V04 15620.512730	V04 15620.612730	3.622	1.771						
0.159	0.188 × 1.417	V04 15900.412730	V04 15900.512730	V04 15900.612730	3.622	1.771						
0.172	0.188 × 1.417	V04 17190.412730	V04 17190.512730	V04 17190.612730	3.622	1.771						
0.188	0.188 × 1.417	V04 18750.412730	V04 18750.512730	V04 18750.612730	3.622	1.771						
0.203	0.250 × 1.417	V04 20310.412730	V04 20310.512730	V04 20310.612730	3.622	1.771						
0.219	0.250 × 1.417	V04 21870.412730	V04 21870.512730	V04 21870.612730	3.622	1.771						
0.221	0.250 × 1.417	V04 22100.412730	V04 22100.512730	V04 22100.612730	3.622	1.771	●	●	●			
0.234	0.250 × 1.417	V04 23440.412730	V04 23440.512730	V04 23440.612730	3.622	1.771						
0.250	0.250 × 1.417	V04 25000.412730	V04 25000.512730	V04 25000.612730	3.937	2.047						
0.257	0.312 × 1.417	V04 25700.412730	V04 25700.512730	V04 25700.612730	3.937	2.047						
0.261	0.312 × 1.417	V04 26100.412730	V04 26100.512730	V04 26100.612730	3.937	2.047						
0.266	0.312 × 1.417	V04 26560.412730	V04 26560.512730	V04 26560.612730	3.937	2.047	●	●	●			
0.281	0.312 × 1.417	V04 28120.412730	V04 28120.512730	V04 28120.612730	4.251	2.362						
0.297	0.312 × 1.417	V04 29690.412730	V04 29690.512730	V04 29690.612730	4.251	2.362						
0.313	0.437 × 1.574	V04 31250.412730	V04 31250.512730	V04 31250.612730	4.251	2.362						
0.328	0.437 × 1.574	V04 32810.412730	V04 32810.512730	V04 32810.612730	4.803	2.677						
0.332	0.437 × 1.574	V04 33200.412730	V04 33200.512730	V04 33200.612730	4.803	2.677						
0.344	0.437 × 1.574	V04 34380.412730	V04 34380.512730	V04 34380.612730	4.803	2.677						
0.359	0.437 × 1.574	V04 35940.412730	V04 35940.512730	V04 35940.612730	5.118	2.992	●	●	●			
0.375	0.437 × 1.574	V04 37500.412730	V04 37500.512730	V04 37500.612730	5.118	2.992						
0.391	0.437 × 1.574	V04 39060.412730	V04 39060.512730	V04 39060.612730	5.118	2.992						
0.406	0.437 × 1.574	V04 40620.412730	V04 40620.512730	V04 40620.612730	5.984	3.543						
0.422	0.437 × 1.574	V04 42190.412730	V04 42190.512730	V04 42190.612730	5.984	3.543						
0.438	0.500 × 1.771	V04 43750.412730	V04 43750.512730	V04 43750.612730	5.984	3.543						
0.453	0.500 × 1.771	V04 45310.412730	V04 45310.512730	V04 45310.612730	5.984	3.543						
0.469	0.500 × 1.771	V04 46880.412730	V04 46880.512730	V04 46880.612730	5.984	3.543	●	●	●			
0.484	0.500 × 1.771	V04 48440.412730	V04 48440.512730	V04 48440.612730	6.692	4.173						
0.500	0.500 × 1.771	V04 50000.412730	V04 50000.512730	V04 50000.612730	6.692	4.173						


Guidelines for solid drilling				5xD / 7-8xD																					
Material group	Strength Rm lb/ins ²	Hardness HB	Material	Material example ANSI / SAE	Cutting speed v _c ft/min			Feed f in/rev																	
					min	opt.	max	Ø 0.120-0.197			Ø 0.198-0.315			Ø 0.316-0.394			Ø 0.395-0.472			Ø 0.473-0.551			Ø 0.552-0.750		
								min	opt.	max	min	opt.	max	min	opt.	max	min	opt.	max	min	opt.	max	min	opt.	max
P	1.0	≤72500	non-alloy steels	A570.36 1213 A573.81	310	380	440	0.003	0.006	0.008	0.006	0.008	0.010	0.006	0.009	0.012	0.008	0.011	0.014	0.010	0.013	0.016	0.012	0.015	0.018
	2.0	72500-130000	non-alloy / low alloy steels	5120 1055 5115	230	280	330	0.002	0.005	0.007	0.005	0.007	0.009	0.006	0.008	0.010	0.007	0.009	0.012	0.008	0.011	0.014	0.012	0.017	0.019
	2.1	<72500	lead alloys	12L13	230	280	330	0.002	0.005	0.007	0.004	0.007	0.010	0.008	0.011	0.014	0.010	0.013	0.016	0.012	0.015	0.018	0.014	0.017	0.020
	3.0	>130000-174000	non alloy / low alloy steels: heat resistant structural, heat treated, nitride and tools steels	4140 1064	230	245	260	0.002	0.004	0.006	0.004	0.006	0.008	0.005	0.007	0.010	0.006	0.009	0.012	0.008	0.011	0.014	0.010	0.013	0.016
	4.0	>174000	high alloy steels	H13 H21	145	195	245	0.002	0.004	0.005	0.004	0.006	0.007	0.005	0.007	0.009	0.006	0.009	0.011	0.007	0.010	0.013	0.008	0.011	0.014
S	5.0		250 special alloys: Inconel, Hastelloy, Nimonic, stc.	Inconel® 718 Nimonic® 80A																					
	5.1	58000	titanium, titanium alloys	AMS R54520																					
M	6.0	≤87000	stainless steels	304L 316	130	180	230	0.002	0.005	0.007	0.005	0.007	0.006	0.008	0.010	0.007	0.009	0.012	0.008	0.011	0.014	0.009	0.012	0.016	
	6.1	<130000	stainless steels	630	80	150	210	0.002	0.003	0.004	0.004	0.006	0.004	0.007	0.009	0.006	0.008	0.010	0.006	0.009	0.012	0.008	0.011	0.014	
	7.0	>130000	stainless / fireproof steels	420 403	50	100	130	0.002	0.003	0.004	0.002	0.004	0.006	0.003	0.005	0.007	0.005	0.007	0.009	0.006	0.008	0.010	0.006	0.009	0.012
K	8.0		180 gray cast iron	No 35 B No 50 B	295	380	460	0.004	0.006	0.010	0.006	0.009	0.008	0.012	0.016	0.010	0.013	0.016	0.010	0.014	0.018	0.012	0.016	0.020	
	8.1		250 alloy gray cast iron	A436 Type 2	230	310	390	0.004	0.006	0.010	0.006	0.009	0.008	0.012	0.016	0.010	0.013	0.016	0.010	0.014	0.018	0.012	0.016	0.020	
	9.0	≤87000	130 ductile cast iron, ferritic	60-40-18	330	390	460	0.003	0.006	0.008	0.006	0.008	0.006	0.012	0.016	0.008	0.011	0.014	0.010	0.013	0.016	0.012	0.015	0.018	
	9.1		230 ductile cast iron, ferritic / perlitic	80-55-06	260	330	390	0.002	0.005	0.007	0.004	0.006	0.008	0.006	0.008	0.010	0.007	0.009	0.012	0.008	0.011	0.014	0.010	0.013	0.016
	10.0	>87000	250 spheroidal graphite cast iron, perlitic malleable iron	100-70-03 70003	230	295	360	0.002	0.005	0.007	0.004	0.006	0.008	0.006	0.008	0.010	0.007	0.009	0.012	0.008	0.011	0.014	0.010	0.013	0.016
	10.1		200 alloyed spheroidal graphite cast iron	A43D2	195	230	260	0.002	0.005	0.007	0.004	0.006	0.008	0.006	0.008	0.010	0.007	0.009	0.012	0.008	0.011	0.014	0.010	0.013	0.016
	10.2		300 vermicular cast iron		195	230	260	0.002	0.005	0.007	0.004	0.006	0.008	0.006	0.008	0.010	0.007	0.009	0.012	0.008	0.011	0.014	0.010	0.013	0.016
N	12.0		90 copper alloy, brass, lead-alloy bronze, lead bronze: good cut	UNS C36000																					
	12.1		100 copper alloy, brass, bronze: average cut																						
	13.0		60 wrought aluminum alloys	GD-AISI12																					
	13.1		75 cast aluminum alloy: Si-content <10% magnesium alloy																						
H	14.0		100 cast aluminum alloy: Si-content > 10%	A360.2																					
	15.0	203000	hardened steels < 45 HRC																						
	16.0	261000	hardened steels > 45 HRC, ≤ 55 HRC																						


5xD / 7-8xD


1.  **Starting on uneven surfaces (cast surfaces)**
- depending on the quality of the surface or when spot drilling, reduce the feed


2.  **Starting on angled surfaces**
- spot face surface before starting bore


3.  **Angled bore exit**
- reduce feed by 50 % in the exit area


4.  **Starting on curved surfaces**
- drilling on centre with reduced feed is possible
 - spot facing is required if the bore start point is outside the radius centre


5.  **Drilling through a cross bore**
- half feed rate at interruption


6.  **Starting on a groove or large centering bore**
- end-face the seam or center beforehand where applicable (diameter min. 0.1 mm greater than drill diameter)
 - possible under certain conditions, reduce feed where necessary

7.  **Drilling a chamfer**
- not possible

8.  **Starting on an edge**
- not possible (start point must be flat)

9.  **Starting on a welded seam**
- spot face surface before starting bore

10.  **Drilling through stacked plates**
- possible in principle
 - good workpiece clamping required
 - avoid large spaces between elements

11.  **Roughing**
- 5xD and 7-8xD possible

KOMET of America, Inc.

2050 Mitchell Blvd.
Schaumburg, IL 60193-4544
USA
MAIN OFFICE: (847) 923-8400
FAX: (800) 865-6638
ORDER ENTRY: (847) 923-8480
customerservice.us@kometgroup.com

KOMET de Mexico, S. de R. L. de C.V.

Acceso 1 Nave 8, No. 116
Fraccionamiento Industrial La Montaña,
Querétaro, QRO. C.P 76138
MEXICO
TEL: (52) (442) 218-2544
FAX: (52) (442) 218-2077
customerservice.mx@kometgroup.com

**KOMET of Canada
Tooling Solutions ULC**

250 Harry Walker Pkwy N
Unit 6B
Newmarket, ON L3Y 7B4
CANADA
TEL: (905) 954-0466
FAX: (905) 954-1068
customerservice.ca@kometgroup.com

www.komet.com